

FEATURES OF STIRRERS

From the small, handy mixer up to the mobile mixing station. Our reliable, well made, durable and easy to use EIBENSTOCK mixing range has something for everyone in the plastering, painting and masonry trades. We offer a quick change paddle adaptor with M14 thread for the entire range as an accessory.



Contra twin stirrer up to 60 kg
EZR 22 R R/L Set

Contra twin stirrer up to 80 kg
EZR 23 R R/L Set



Powerful
with new gearbox



The stirrers for efficient mixing also of most difficult and multicomponent materials


USE:

- Mixing clockwise of highly viscous and stiff materials, e.g. tile cement, ready-mixed mortar and plaster, screed, epoxy resins, sealants, granules, multi-component materials, coatings
- Mixing anticlockwise of building materials with low and middle viscosity, e.g. paint, glue, filler and leveling compounds
- Drywall construction, tiler, painter and plasterer, civil engineering, floor renovators

FEATURES:

- Two mixing effects simply by switching
- Two contra rotating stirring rods – no counter torque, easy handling, saves time and effort
- Electronic switch – dust protected
- Soft start for less splashing
- Temperature control

- Stepless speed regulation and constant speed – optimum settings on the material to be mixed
- Cap with labyrinth-guide – protection against dust, dirt, stones, splash water
- Damping and protection elements

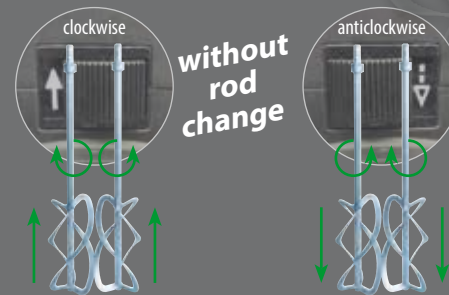

Stirring rods pull material from the bottom to the top, few air inclusions, easy guiding, for viscous materials

Stirring rods push material from the top to the bottom, less splash during mixing

SPECIFICATIONS	EZR 22 R R/L SET
Power input	1300 W
Rated voltage	230 V ~
Rated speed	140-400 rpm
Total diameter rods	220 mm
Spindle connection	Special
Weight	6.7 kg
Order no.	0774C000
Supplied	in a box incl. stirring rods Z 220


SPECIFICATIONS	EZR 23 R R/L SET
Power input	1800 W
Rated voltage	230 V ~
Rated speed	200-530 rpm
Total diameter rods	230 mm
Spindle connection	Special
Weight	7.1 kg
Order no.	0774P000
Supplied	in a box incl. stirring rods Z 230



THE FEATURES OF THE STIRRERS OF THE NEW GENERATION



Damping and protection elements made of polyurethane – protection of the machine and the surface in case of unintentional fall

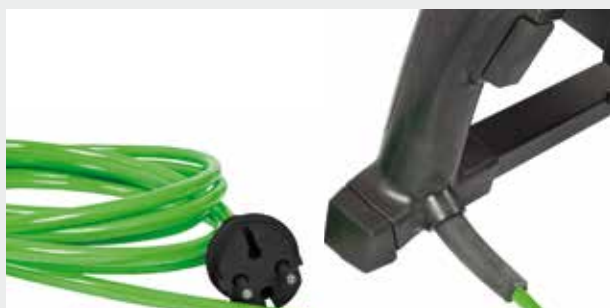

Dust protected electronic switch, PUR-construction site cable and a protected cable outlet



Wide, trapezium design, ergonomic handles and balanced center of gravity – easy, well balanced guiding of the machine for greater leverage



Extensions and quick change adapters allow the user to easily change the stirring rod and adapt the stirrer to the users size, without the need for tools.

