

SW200AC


200Amp AC Welder Petrol Generator

WELDER GENERATOR SPECIFICATION

Welding Output	200 Amps AC
Duty Cycle	35% - 200A / 60% - 170A
Voltage	230/115
Phase	1
Frequency	50Hz
Auxiliary Output	230V @ 6.5kVA / 5.2kW 115V @ 3.2kVA / 2.5kW
Alternator	Meccalte AS200AC
Rod Size (max)	5mm
Alternator Type	Brushless - Smooth Waveform
Fuel tank capacity	6.1 Litres
Autonomy 75% load	2.2 Hours
LWA	97
DBA @ 7M	72

ENGINE SPECIFICATION

Engine	Honda GX390
Emissions certified	N/A
Cylinders	Single
Distribution	O.H.V.
Aspiration	Normally aspirated
Cooling	Air
Displacement	389 cm ³
Rpm	3000
Starting system	Recoil
Fuel	Unleaded 86 octane or higher

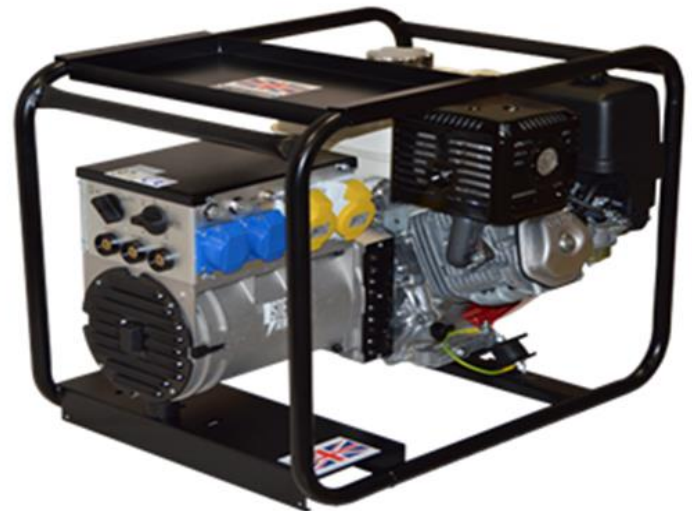

DIMENSIONS (mm)

WEIGHT (KG)

Length	Width	Height	71
690	480	540	

CONTROL BOX

- 3 x DIN 25 welding sockets.
- Amp range switch.
- Voltage selector switch.
- 115V: 2 x 16A BS4343 sockets.
- 230V: 2 x 16A BS4343 sockets.
- Reset circuit breaker overload protection.
- Welder/Generator selector switch.

STANDARD FEATURES

- Oil alert/low oil shutdown.
- 3 Year engine warranty (Limited).
- Full wrap-around frame.
- Brushless smooth waveform alternator.
- Convenient tray for rods & leads.

OPTIONS

- Welding lead sets - 6 or 10 meters.
- Trolley kit.
- Electric start.